


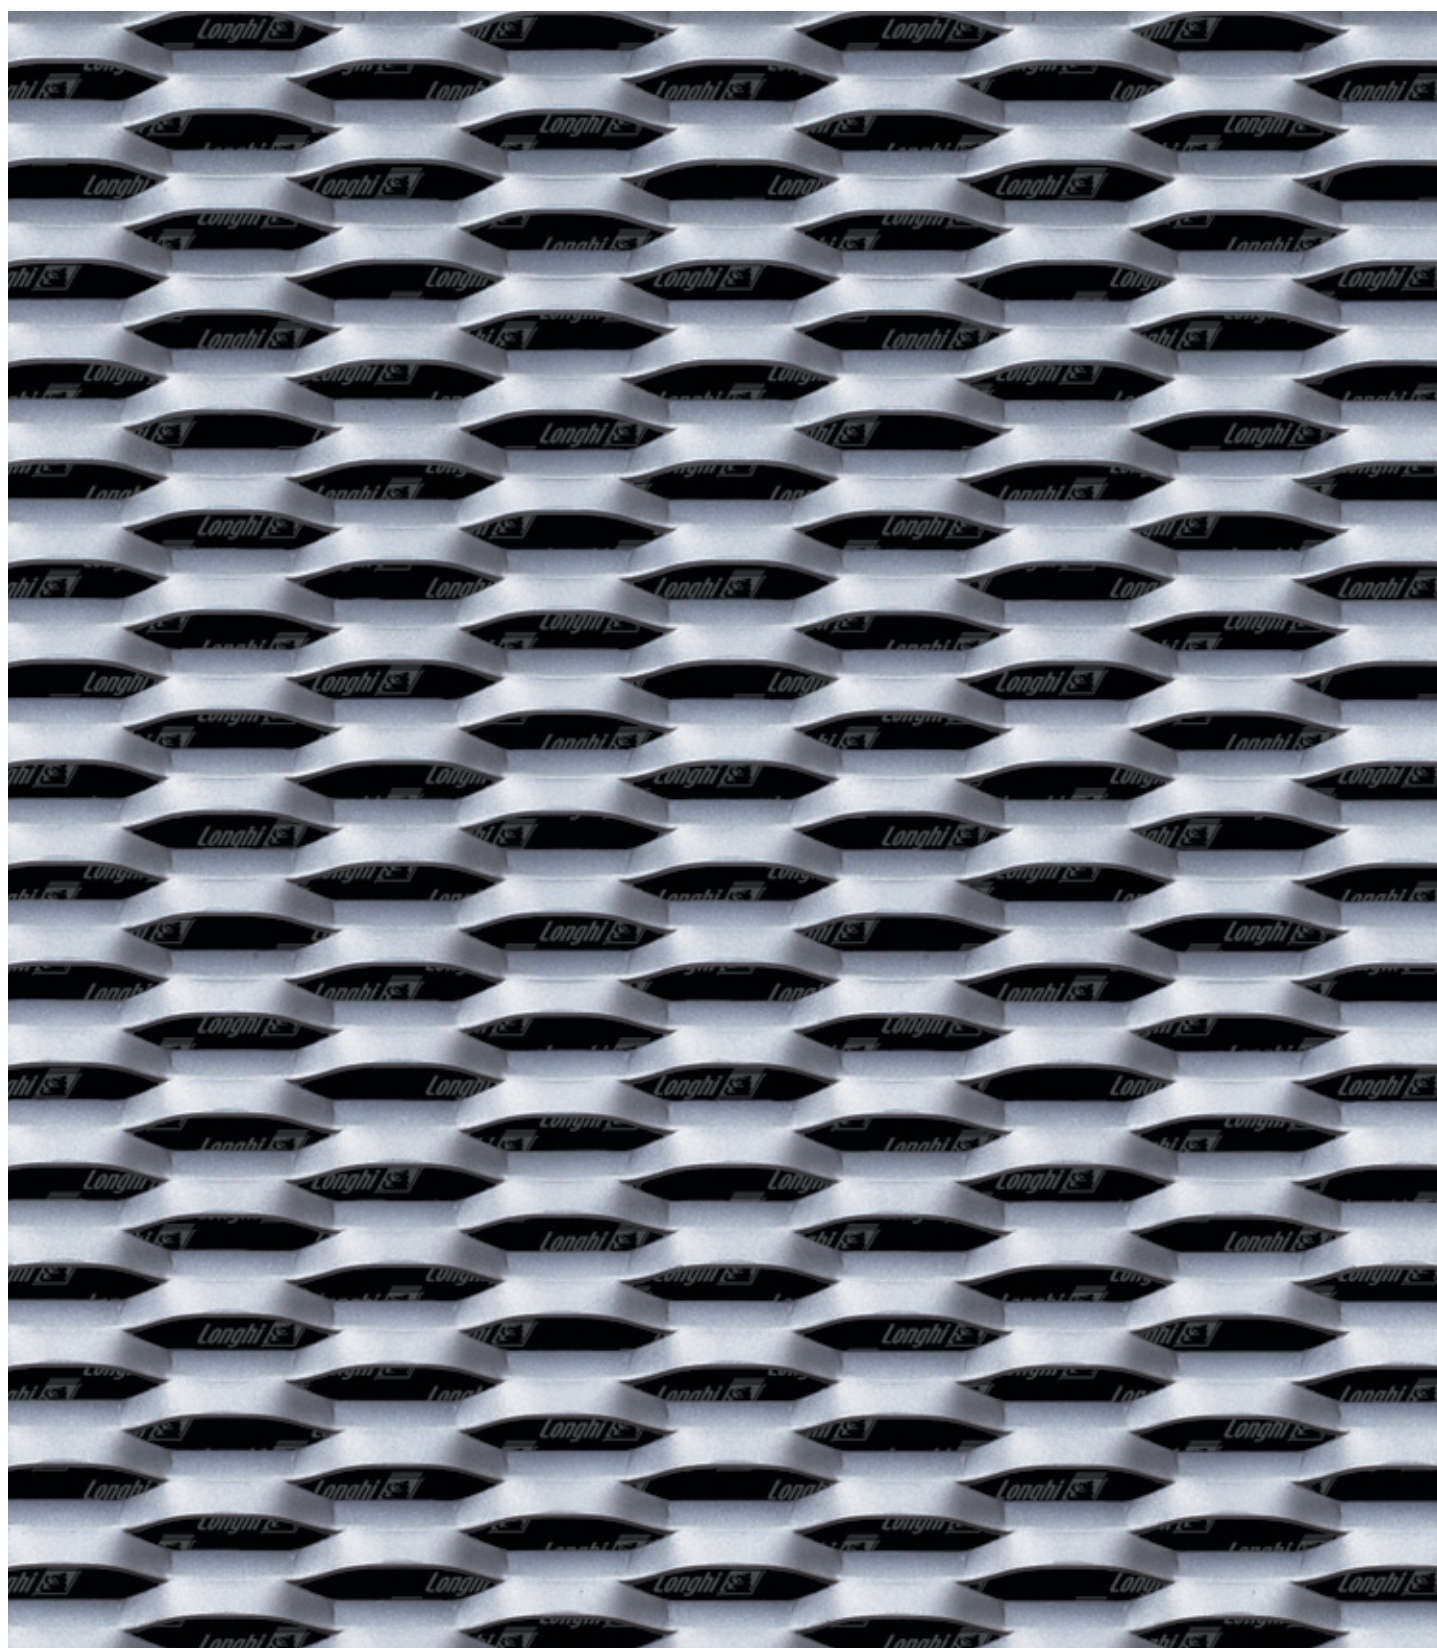

## Fils 21

| Maglia<br>DL x DC - av x sp (mm) | Acciaio al<br>carbonio<br>Kg/m <sup>2</sup> | Alluminio<br>kg/m <sup>2</sup> | Formati pannello<br>(mm)                                         | Spessore<br>pannello<br>finale (mm) | % vuoto<br>frontale<br>(~) |
|----------------------------------|---------------------------------------------|--------------------------------|------------------------------------------------------------------|-------------------------------------|----------------------------|
| 45x15 (13,4) - 5x1,5             | 8,80                                        | 3,00                           | DL 1000 - 1250 - 1500 x DC 3000<br>DL 2000 - 2500 x DC 2000 max. | 7                                   | 33,3%                      |
| 45x15 (13,4) - 5x2               | 11,60                                       | 4,00                           |                                                                  |                                     |                            |
| 45x15 (13,4) - 5x3               | 17,50                                       | 6,00                           |                                                                  |                                     |                            |